



# CEMO PUMPS



Part of the Crown Group of Companies - Traditional Quality & Performance

TYPICAL AVERAGE PERFORMANCE TIPIESE GEMIDDELDE POMPVERMOË				PUMP POMP		CB310	
--	--	--	--	--------------	--	-------	--

MAX MAKS	1500 rpm	MAX. DIFF PRESSURE MAKS. DIFF DRUK	600 kPa	INLET DIAMETER INLAAT DEURSNEE	25 mm
ROTATION ROTASIE	Dual	MIN. STARTING TORQUE MIN. DRAAIMOMENT	3 N.m	OUTLET DIAMETER UITLAAT DEURSNEE	25 mm

TESTED ON WATER AT 20°C

GETOETS OP WATER TEEN 20°C

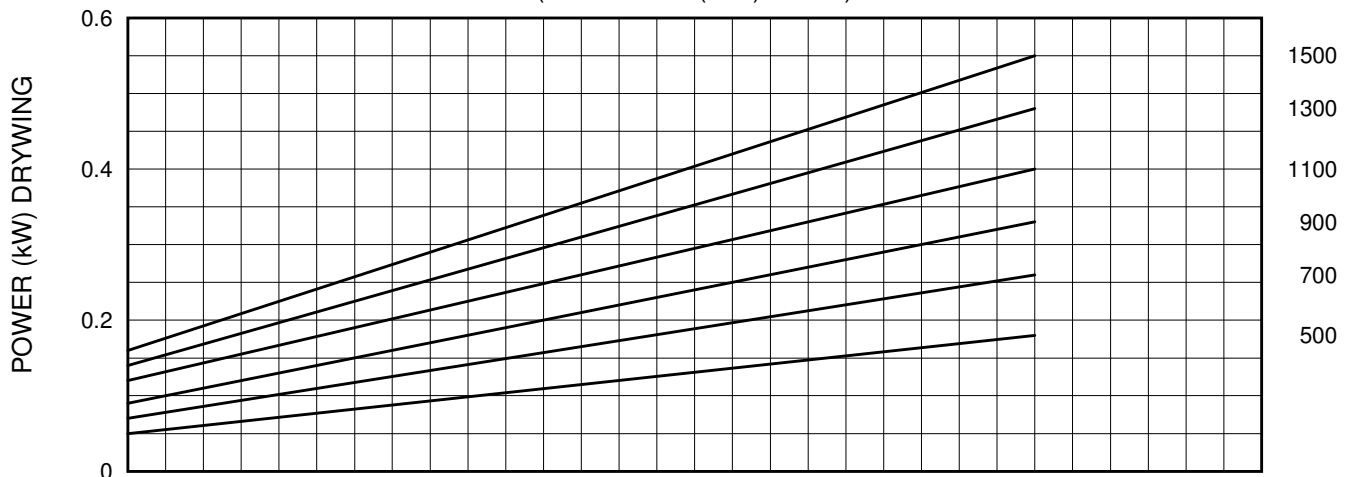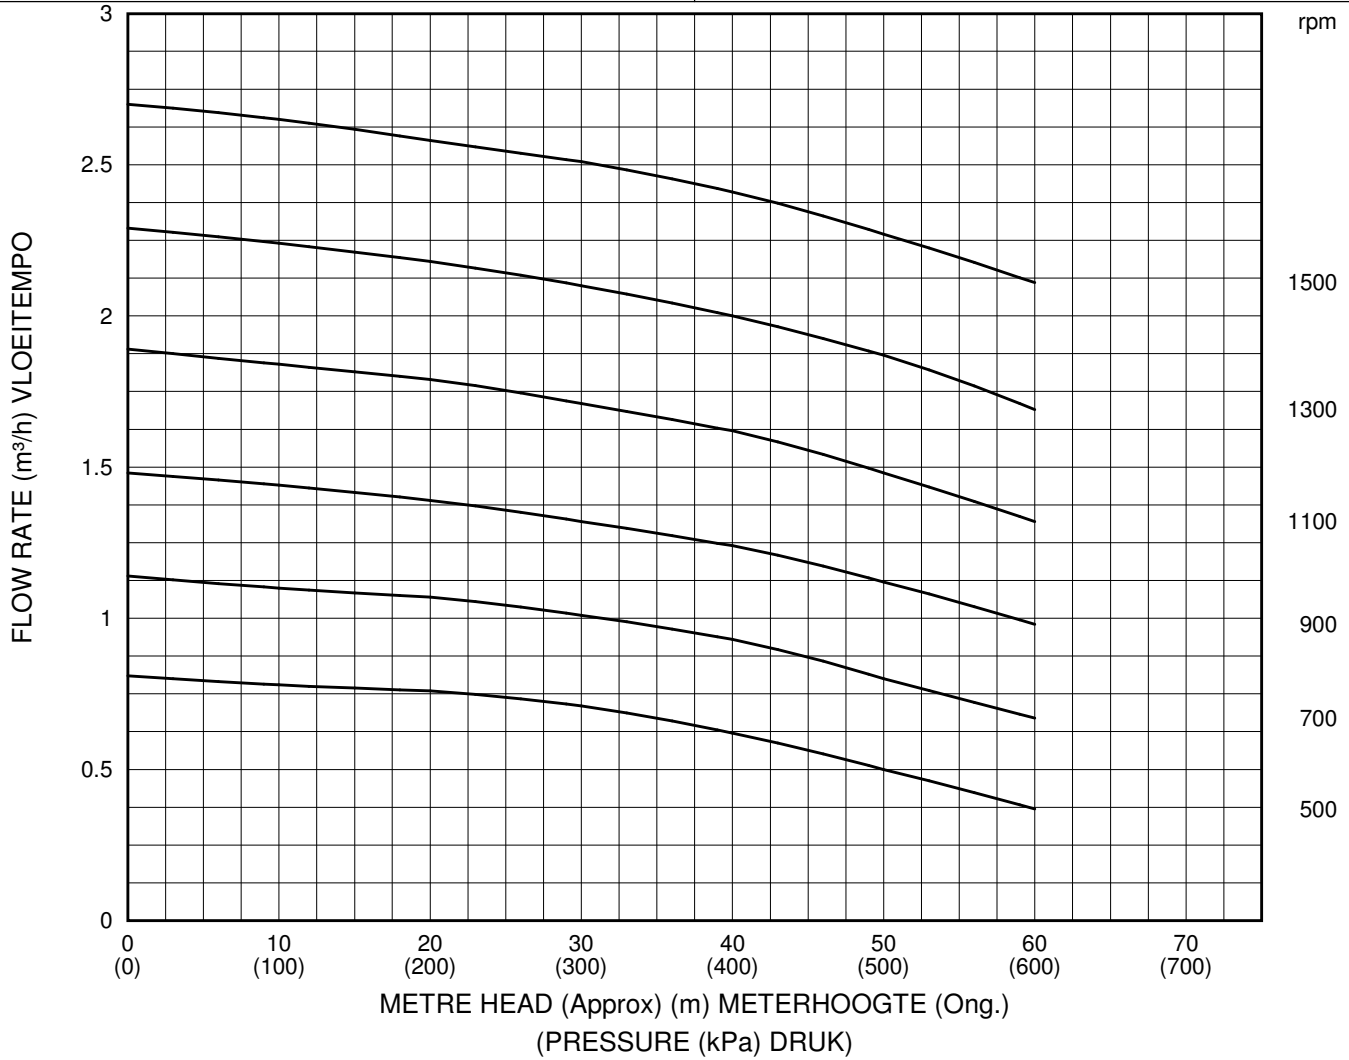



# CEMO PUMPS

Part of the Crown Group of Companies - Traditional Quality & Performance



## TYPICAL AVERAGE PERFORMANCE TIPIESE GEMIDDELDE POMPVERMOË

PUMP POMP      **CB320**

MAX. MAKS	1500 rpm	MAX. DIFF. PRESSURE MAKS. DIFF. DRUK	1200 kPa	INLET DIAMETER INLAAT DEURSNEE	25 mm
ROTATION ROTASIE	Dual	MIN. STARTING TORQUE MIN. DRAAIMOMENT	6.2 N.m	OUTLET DIAMETER UITLAAT DEURSNEE	25 mm

TESTED ON WATER AT 20°C

GETOETS OP WATER TEEN 20°C

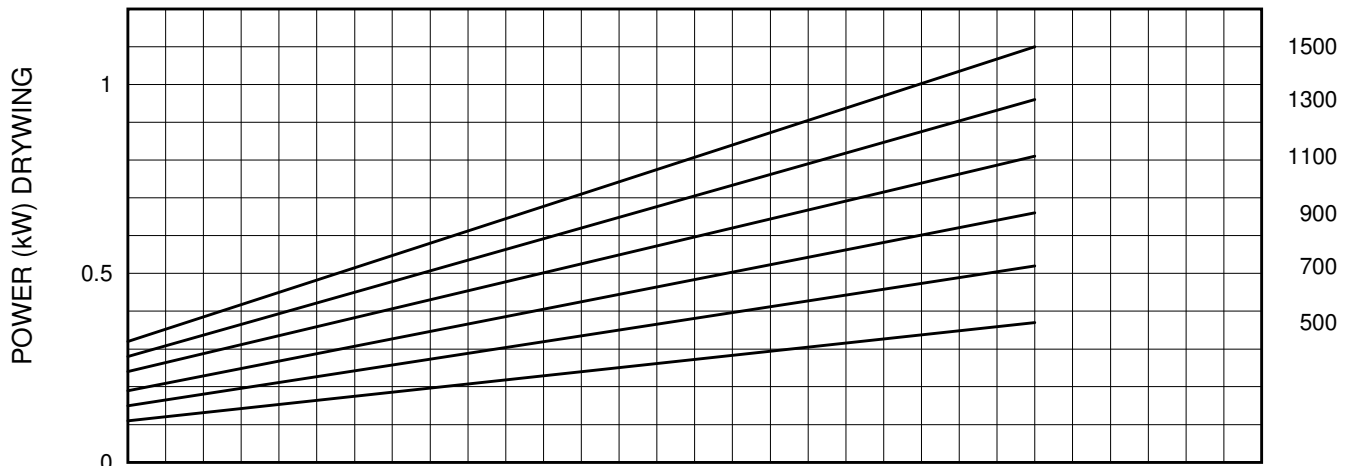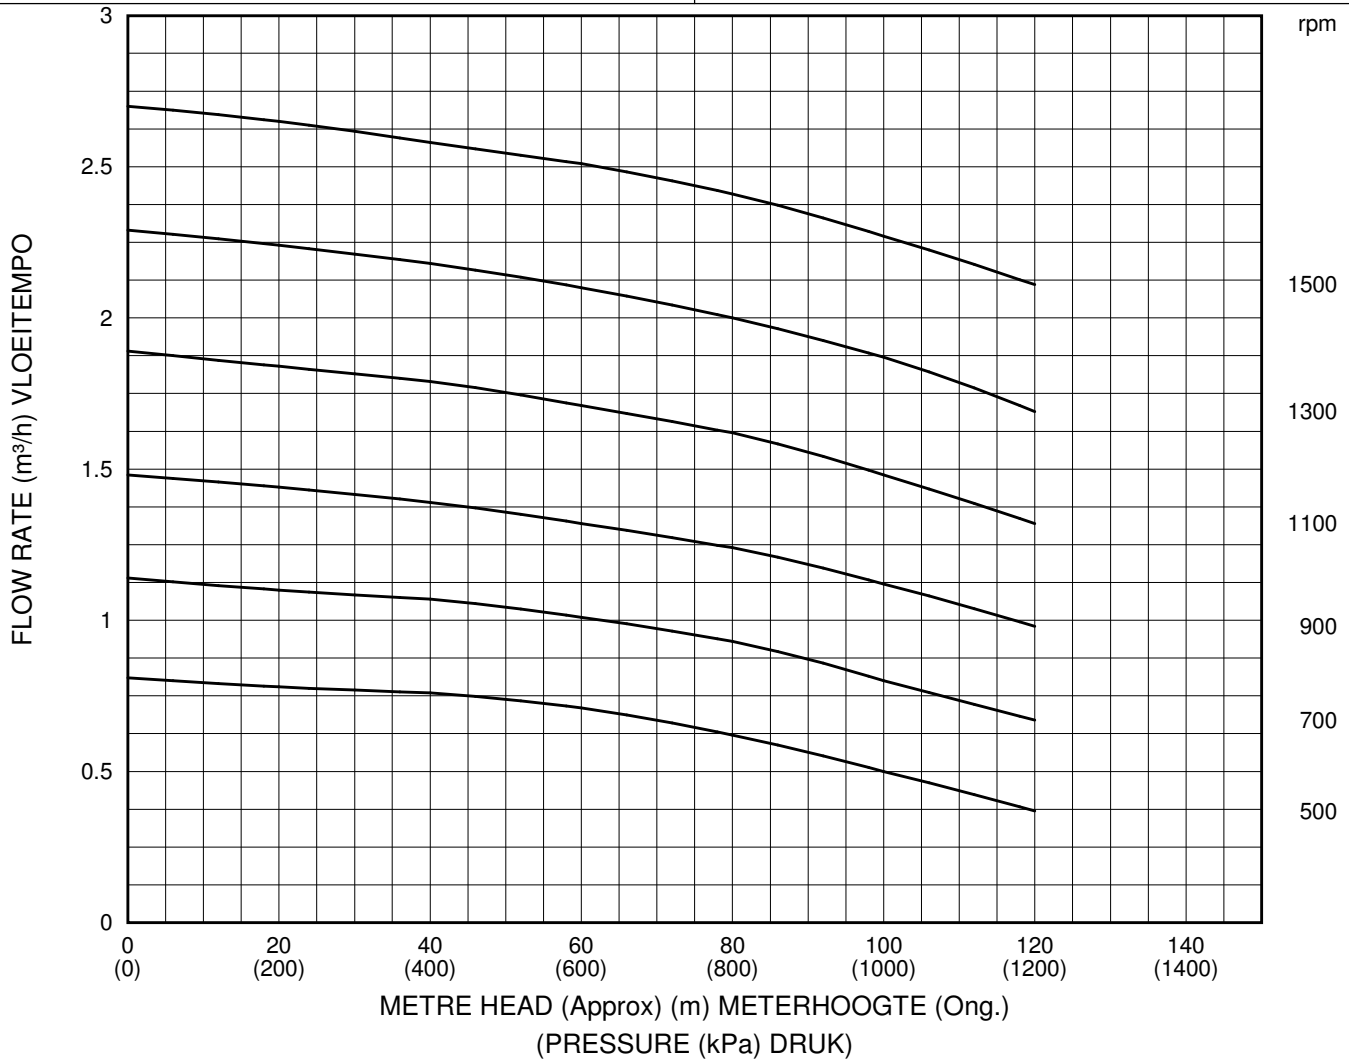



# CEMO PUMPS

Part of the Crown Group of Companies - Traditional Quality & Performance



## TYPICAL AVERAGE PERFORMANCE TIPIESE GEMIDDELDE POMPVERMOË

PUMP POMP      **CB410**

MAX. MAKS	1500 rpm	MAX. DIFF. PRESSURE MAKS. DIFF. DRUK	600 kPa	INLET DIAMETER INLAAT DEURSNEE	40 mm
ROTATION ROTASIE	Dual	MIN. STARTING TORQUE MIN. DRAAIMOMENT	7.7 N.m	OUTLET DIAMETER UITLAAT DEURSNEE	40 mm

TESTED ON WATER AT 20°C

GETOETS OP WATER TEEN 20°C

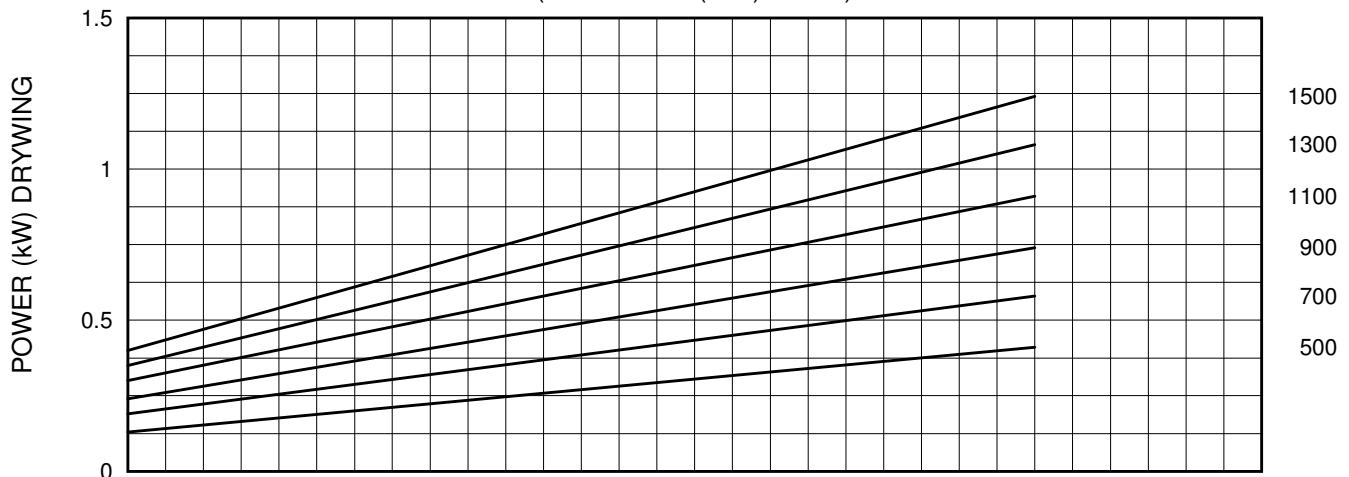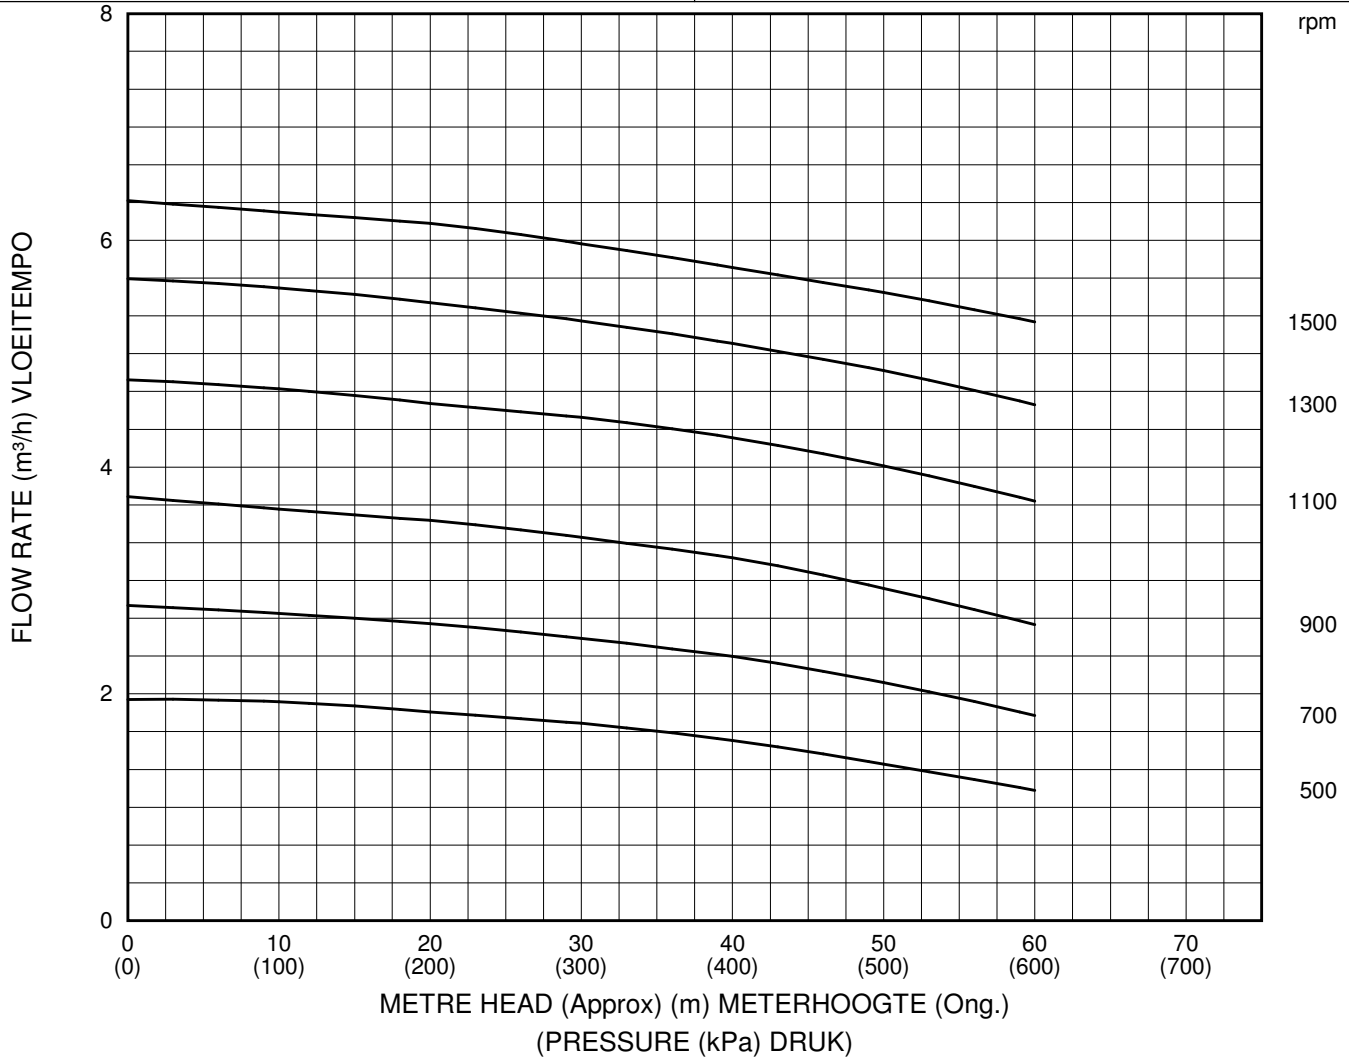



# CEMO PUMPS

Part of the Crown Group of Companies - Traditional Quality & Performance



## TYPICAL AVERAGE PERFORMANCE TIPIESE GEMIDDELDE POMPVERMOË

PUMP POMP      **CB420**

MAX. MAKS	1500 rpm	MAX. DIFF. PRESSURE MAKS. DIFF. DRUK	1200 kPa	INLET DIAMETER INLAAT DEURSNEE	40 mm
ROTATION ROTASIE	Dual	MIN. STARTING TORQUE MIN. DRAAIMOMENT	16 N.m	OUTLET DIAMETER UITLAAT DEURSNEE	40 mm

TESTED ON WATER AT 20°C

GETOETS OP WATER TEEN 20°C

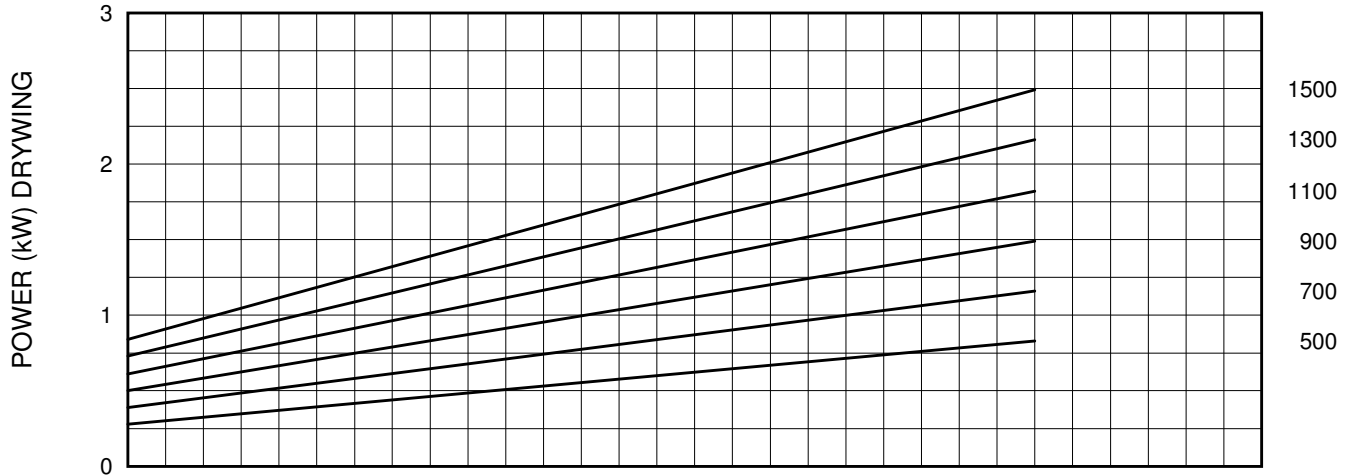
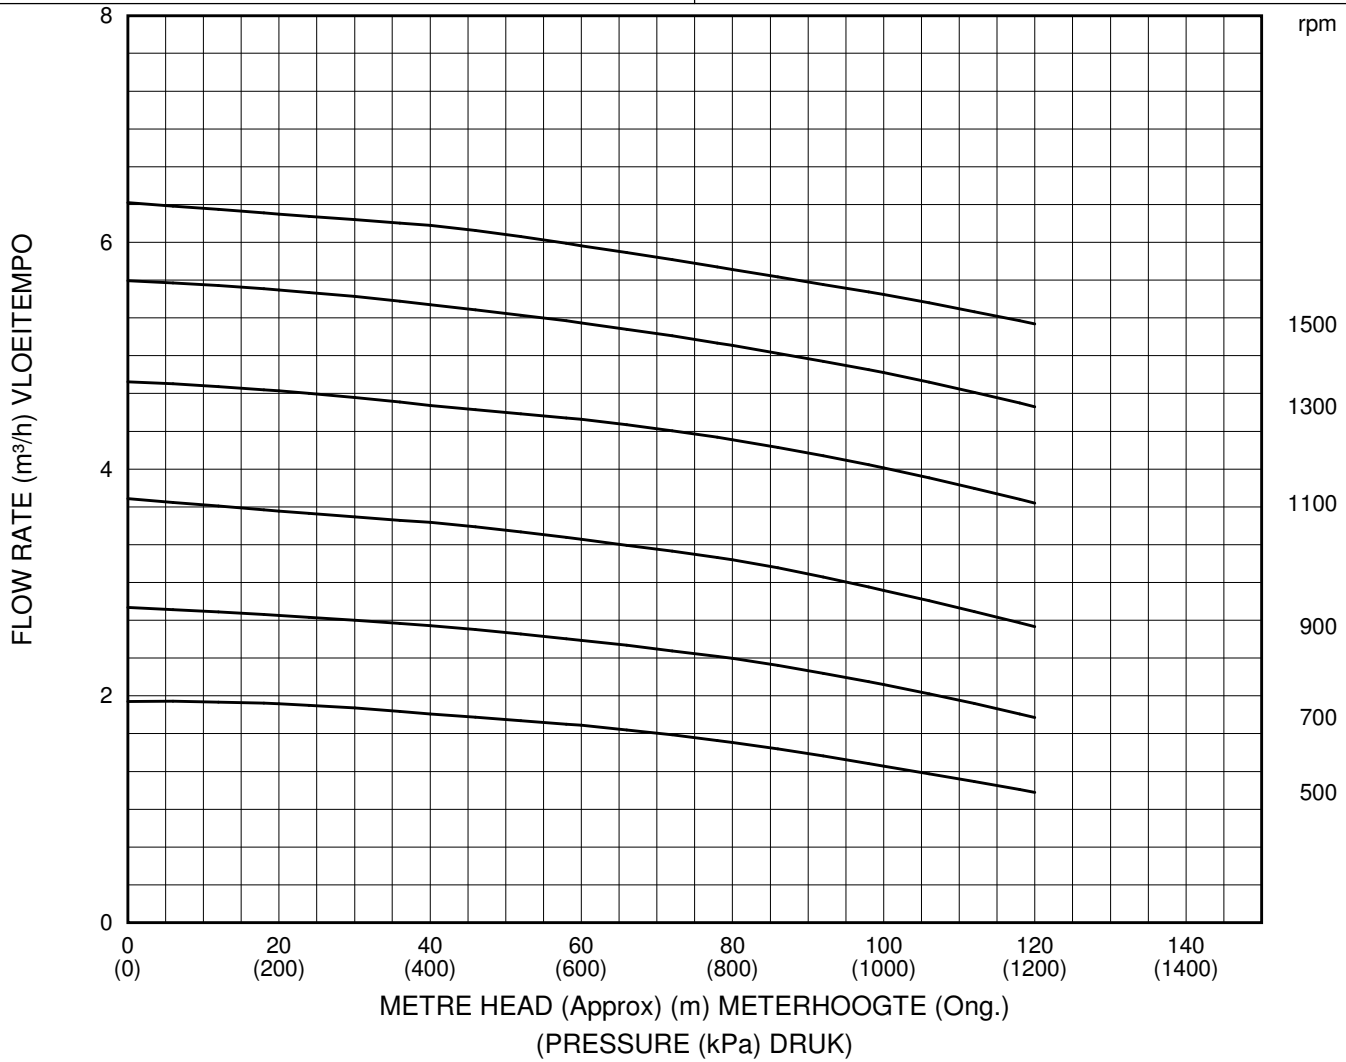




# CEMO PUMPS

Part of the Crown Group of Companies - Traditional Quality & Performance

TYPICAL AVERAGE PERFORMANCE TIPIESE GEMIDDELDE POMPVERMOË				PUMP POMP		CB610	
MAX MAKS	1500 rpm	MAX. DIFF PRESSURE MAKS. DIFF DRUK	600 kPa	INLET DIAMETER INLAAT DEURSNEE	50 mm		
ROTATION ROTASIE	Dual	MIN. STARTING TORQUE MIN. DRAAIMOMENT	14 N.m	OUTLET DIAMETER UITLAAT DEURSNEE	50 mm		
TESTED ON WATER AT 20°C				GETOETS OP WATER TEEN 20°C			

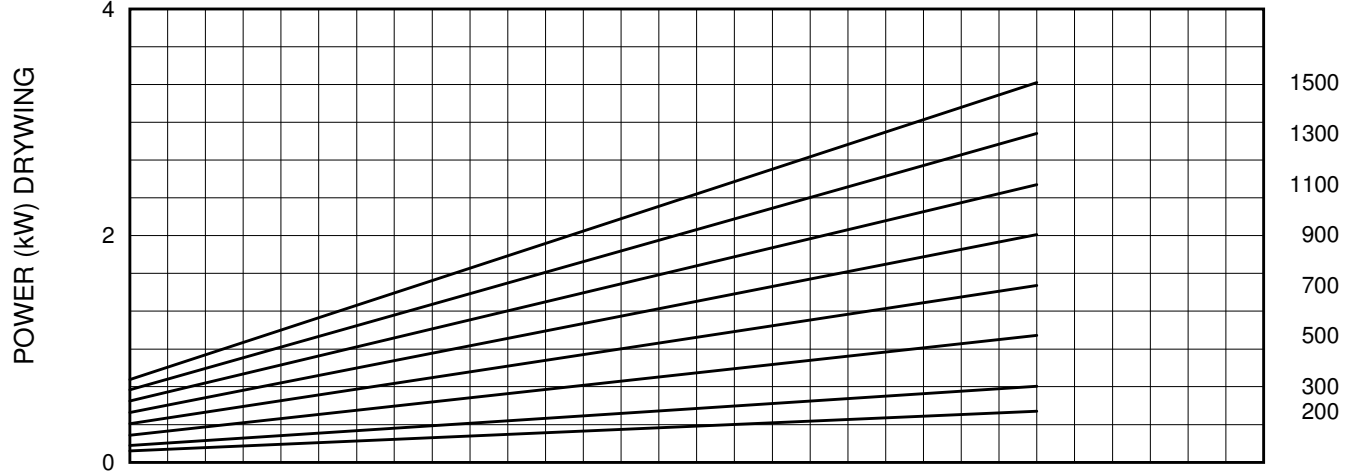
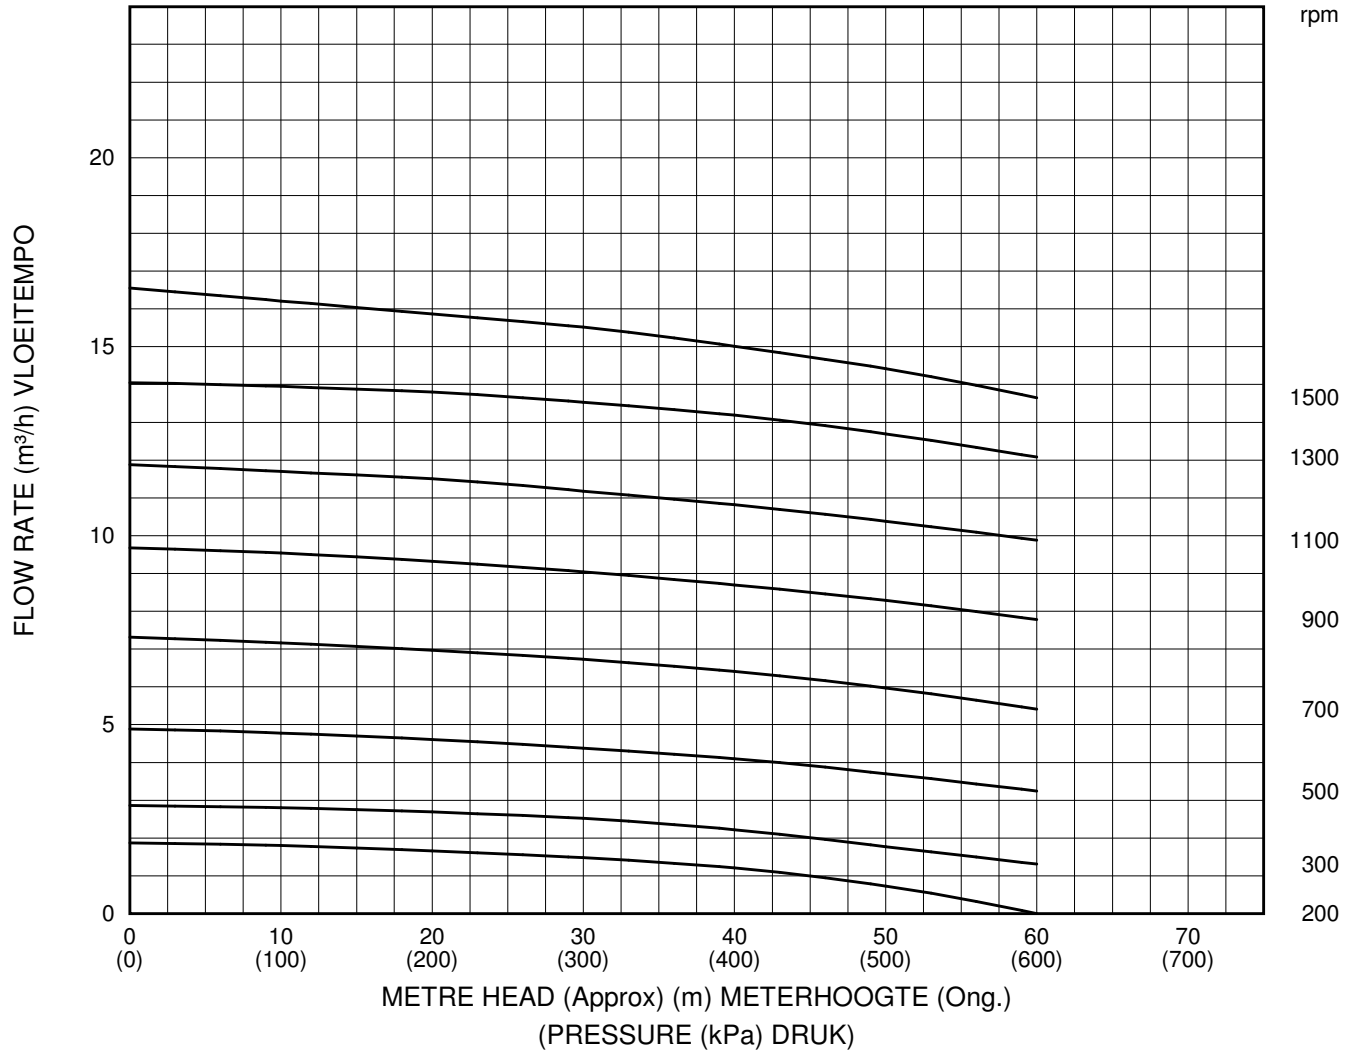




# CEMO PUMPS

Part of the Crown Group of Companies - Traditional Quality & Performance

TYPICAL AVERAGE PERFORMANCE TIPIESE GEMIDDELDE POMPVERMOË				PUMP POMP		CB620	
MAX MAKS	1500 rpm	MAX. DIFF PRESSURE MAKS. DIFF DRUK	1200 kPa	INLET DIAMETER INLAAT DEURSNEE	50 mm		
ROTATION ROTASIE	Dual	MIN. STARTING TORQUE MIN. DRAAIMOMENT	28 N.m	OUTLET DIAMETER UITLAAT DEURSNEE	50 mm		
TESTED ON WATER AT 20°C				GETOETS OP WATER TEEN 20°C			

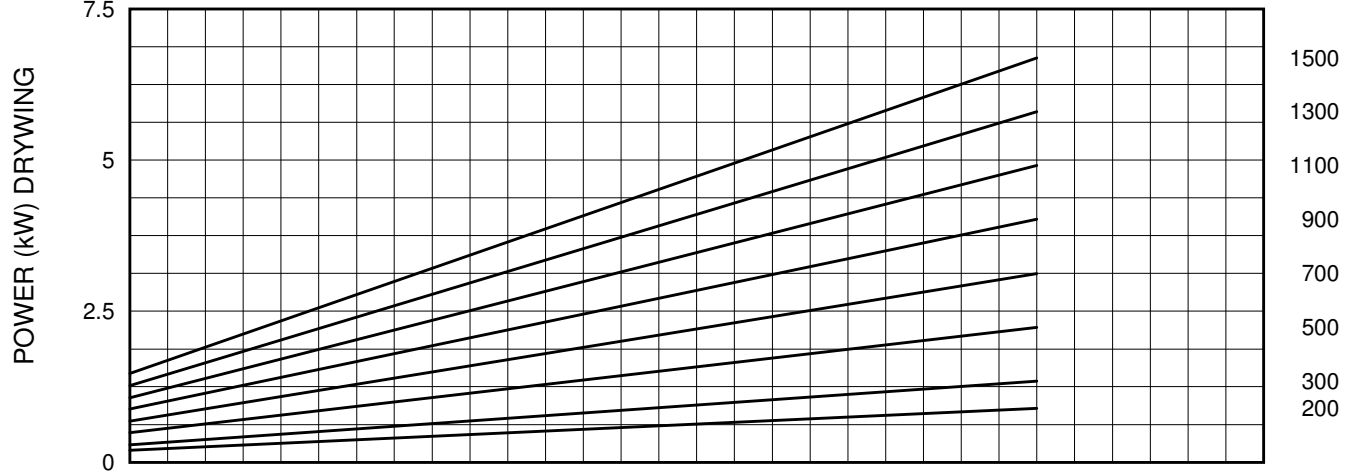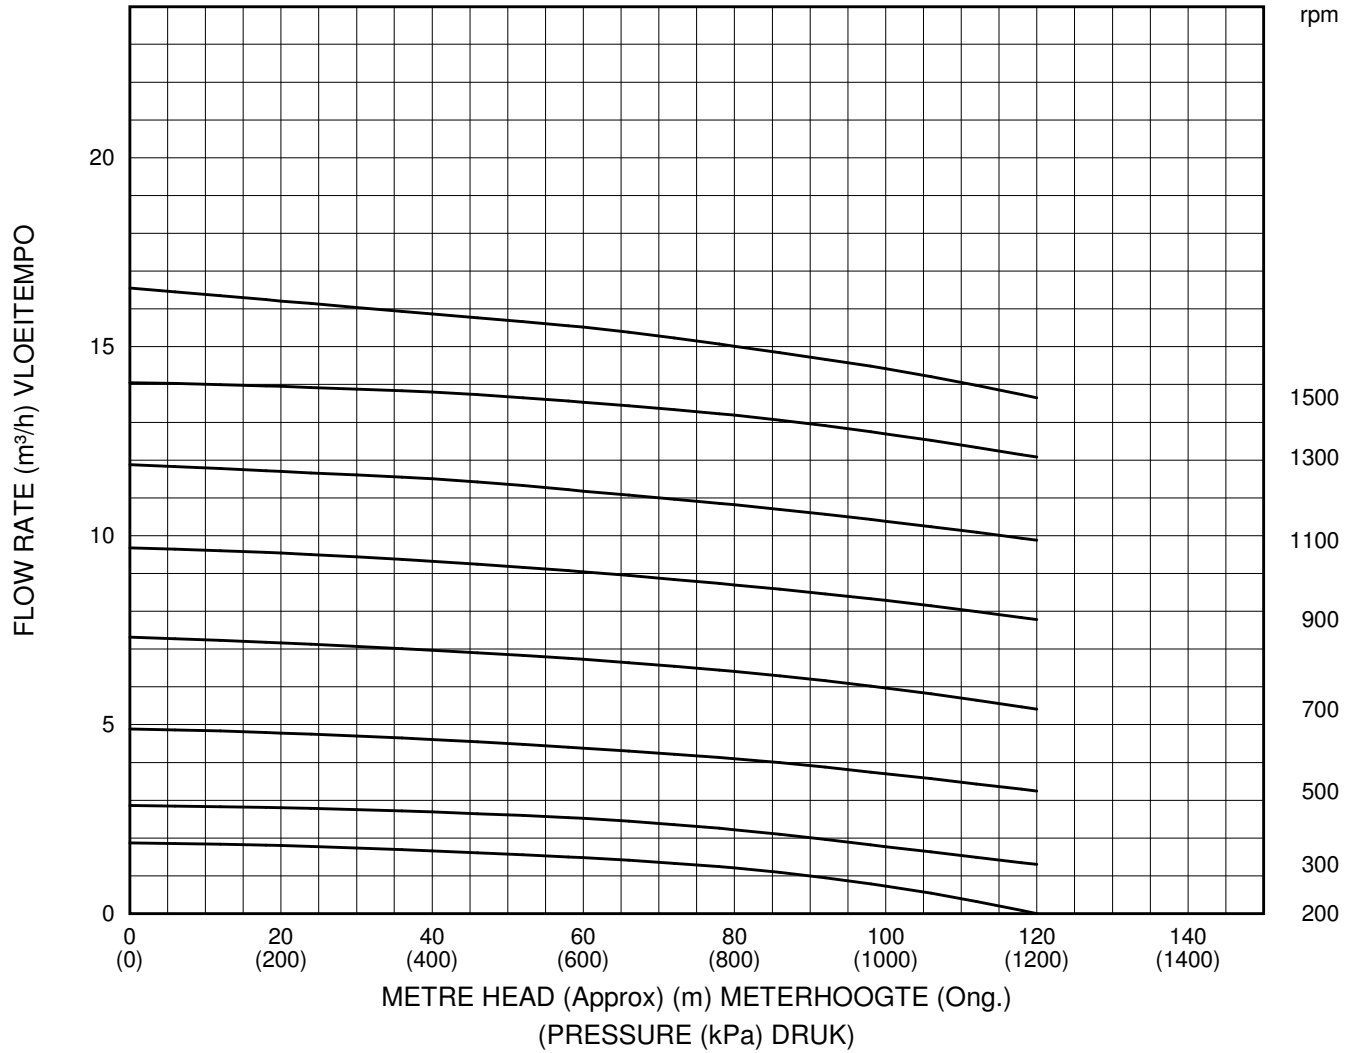



# CEMO PUMPS

Part of the Crown Group of Companies - Traditional Quality & Performance



## TYPICAL AVERAGE PERFORMANCE TIPIESE GEMIDDELDE POMPVERMOË

PUMP  
POMP      **CB710**

MAX MAKS	1000 rpm	MAX. DIFF PRESSURE MAKS. DIFF DRUK	600 kPa	INLET DIAMETER INLAAT DEURSNEE	80 mm
ROTATION ROTASIE	Dual	MIN. STARTING TORQUE MIN. DRAAIMOMENT	31 N.m	OUTLET DIAMETER UITLAAT DEURSNEE	80 mm

TESTED ON WATER AT 20°C

GETOETS OP WATER TEEN 20°C

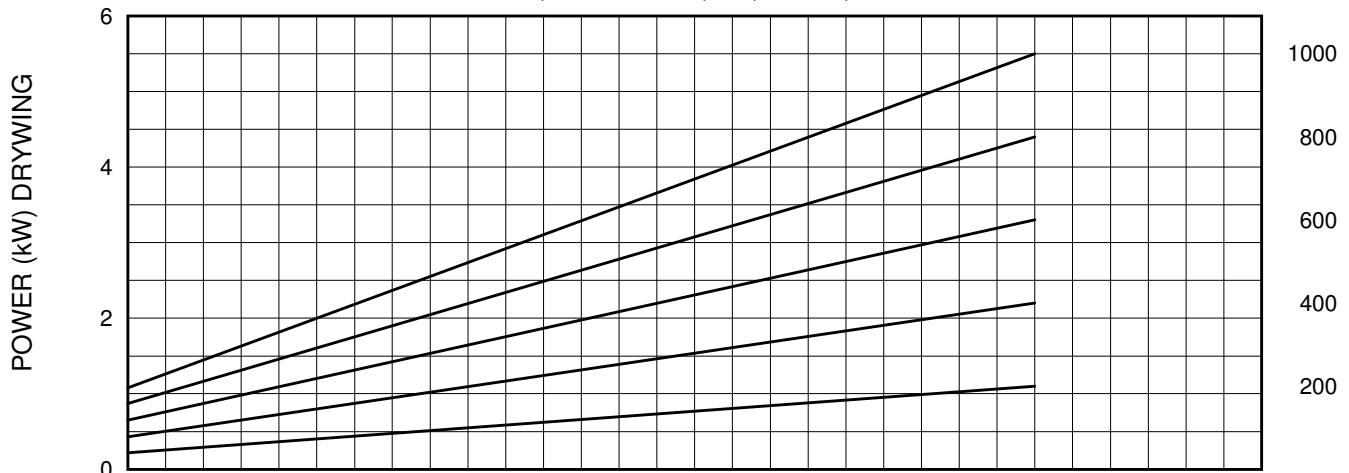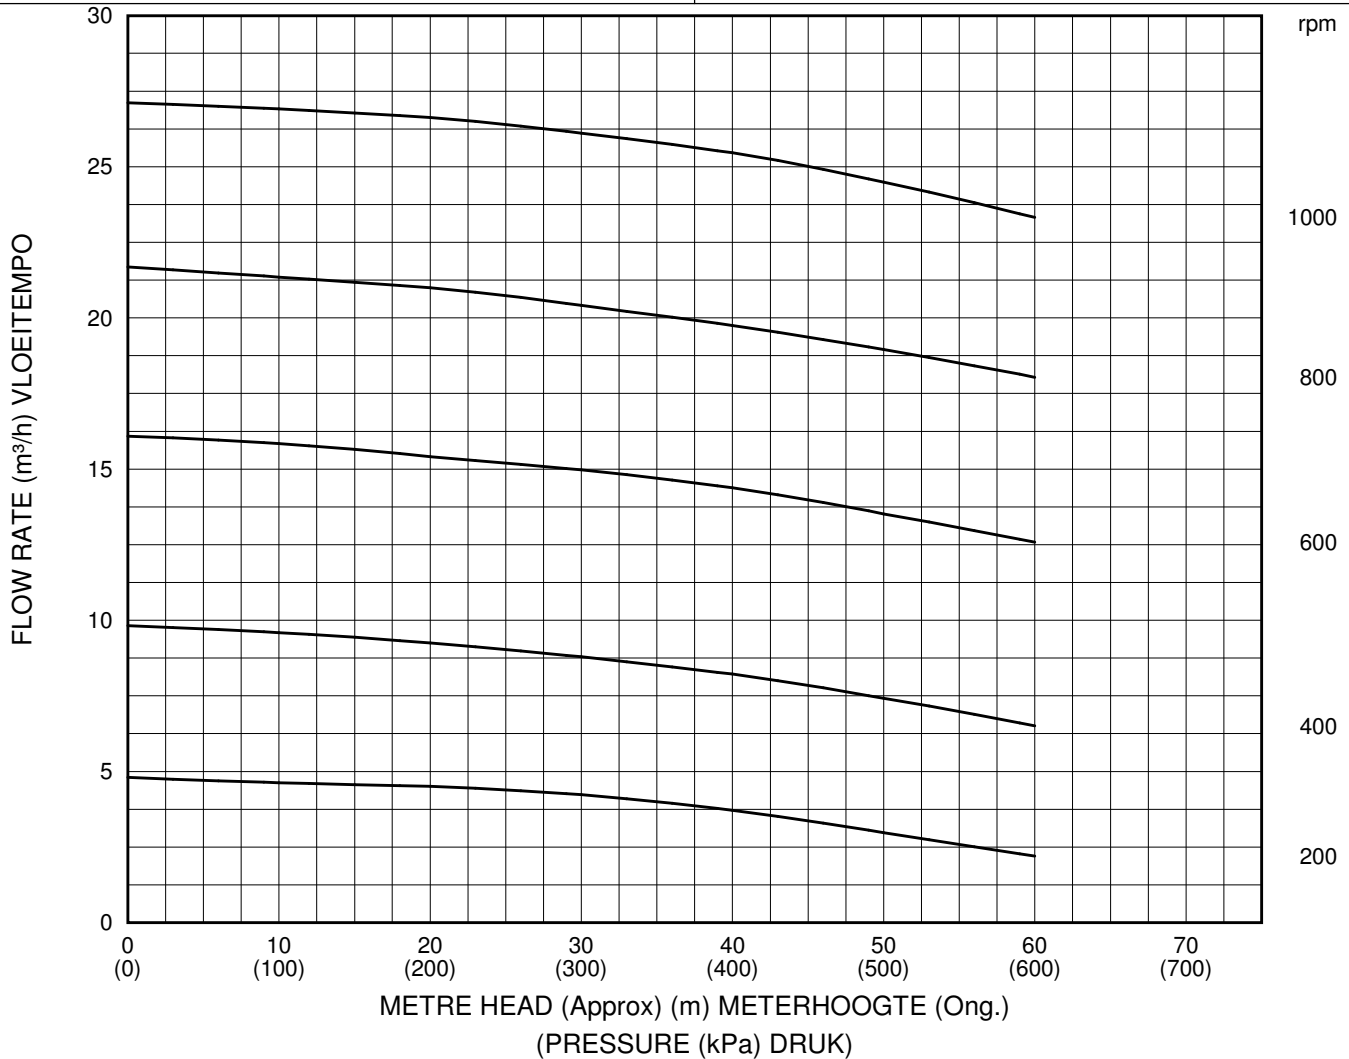



# CEMO PUMPS

Part of the Crown Group of Companies - Traditional Quality & Performance



## TYPICAL AVERAGE PERFORMANCE TIPIESE GEMIDDELDE POMPVERMOË

PUMP  
POMP      **CB720**

MAX MAKS	1000 rpm	MAX. DIFF PRESSURE MAKS. DIFF DRUK	1200 kPa	INLET DIAMETER INLAAT DEURSNEE	80 mm
ROTATION ROTASIE	Dual	MIN. STARTING TORQUE MIN. DRAAIMOMENT	62 N.m	OUTLET DIAMETER UITLAAT DEURSNEE	80 mm

TESTED ON WATER AT 20°C

GETOETS OP WATER TEEN 20°C

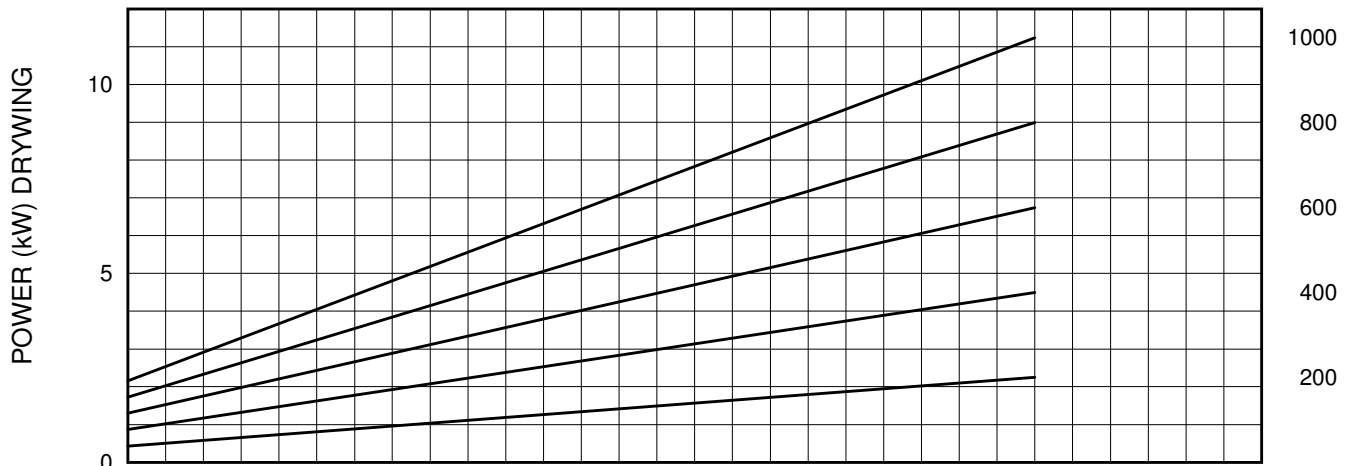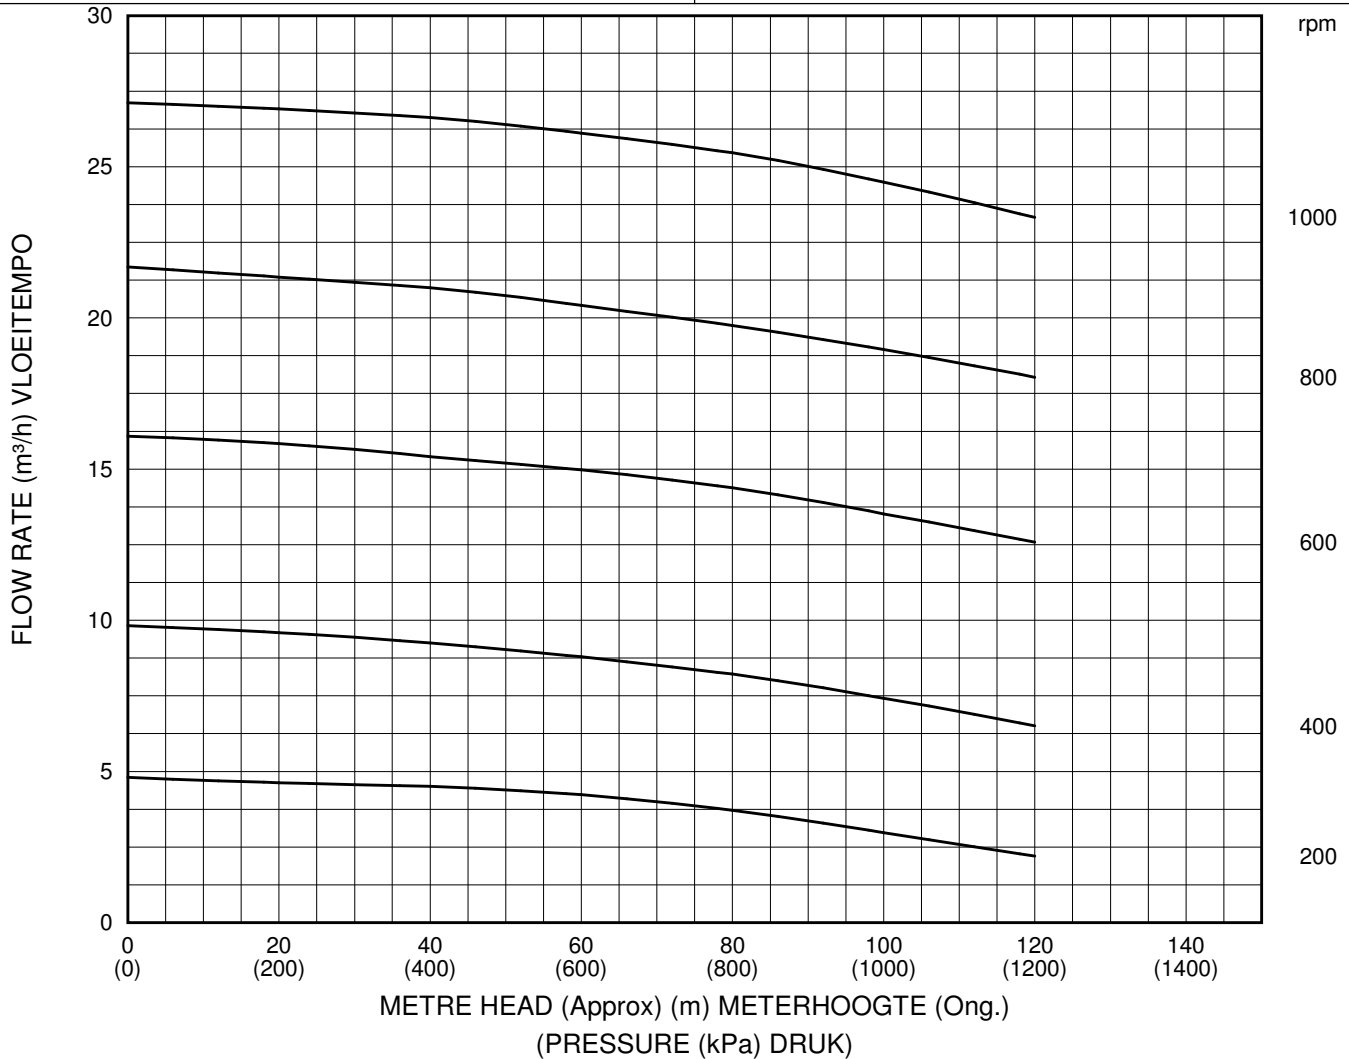



# CEMO PUMPS

Part of the Crown Group of Companies - Traditional Quality & Performance

TYPICAL AVERAGE PERFORMANCE TIPIESE GEMIDDELDE POMPVERMOË				PUMP POMP		CB810	
MAX MAKS	850 rpm	MAX. DIFF PRESSURE MAKS. DIFF DRUK	600 kPa	INLET DIAMETER INLAAT DEURSNEE	80 mm		
ROTATION ROTASIE	Dual	MIN. STARTING TORQUE MIN. DRAAIMOMENT	46 N.m	OUTLET DIAMETER UITLAAT DEURSNEE	80 mm		

TESTED ON WATER AT 20°C

GETOETS OP WATER TEEN 20°C

